
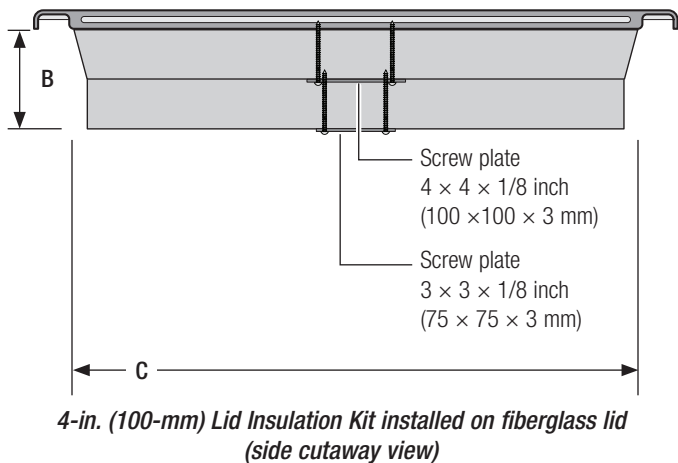


Lid Insulation Kit

For Fiberglass Access Lids

Applications

The Orenco[®] Lid Insulation Kit attaches to an Orenco fiberglass access lid and protects, from freezing, the underground components that are housed in access risers, pump basins, and tanks.

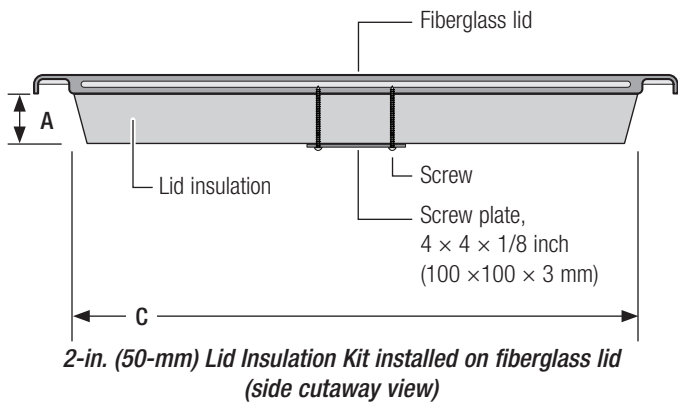

General


Orenco's Lid Insulation Kits come in 2-in. or 4-in. (50- or 100-mm) thicknesses. The 2-in. (50-mm) insulation kit attaches by means of a PVC screw plate and four stainless steel screws. The 4-in. (100-mm) lid insulation attaches by means of two screw plates and eight screws.

NOTE: When ordered as an option on a fiberglass lid, the insulation is attached to the lid at the factory with waterproof adhesive.

Standard Models

INS212, INS242, INS302

Product Code Diagram

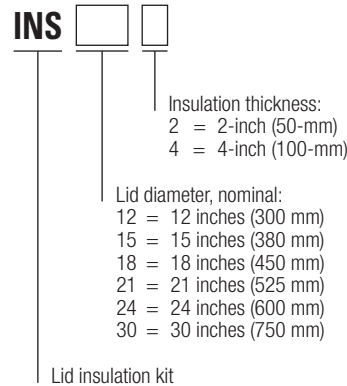

Materials of Construction

Insulation	Styrofoam™ *
Screws	Stainless steel
Screw plate	PVC per ASTM D-1784

* Styrofoam™ is a registered trademark of Dow Chemical Company

Specifications

Model	INS212	INS242	INS302
A, in. (mm)	2 (50)	2 (50)	2 (50)
B, in. (mm)	4 (100)	4 (100)	4 (100)
C, in. (mm)	20 (508)	23 (584)	28.5 (724)
R-Value, per layer	10	10	10
Taper angle, approximate	15°	15°	15°